



ACCESSORIES

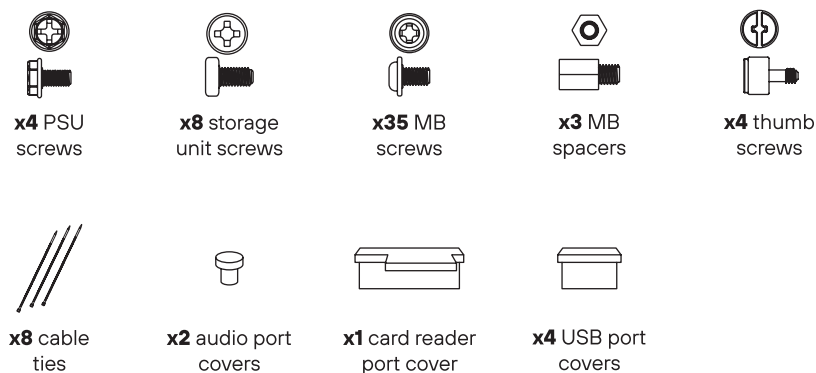

OPENING THE PC CASE

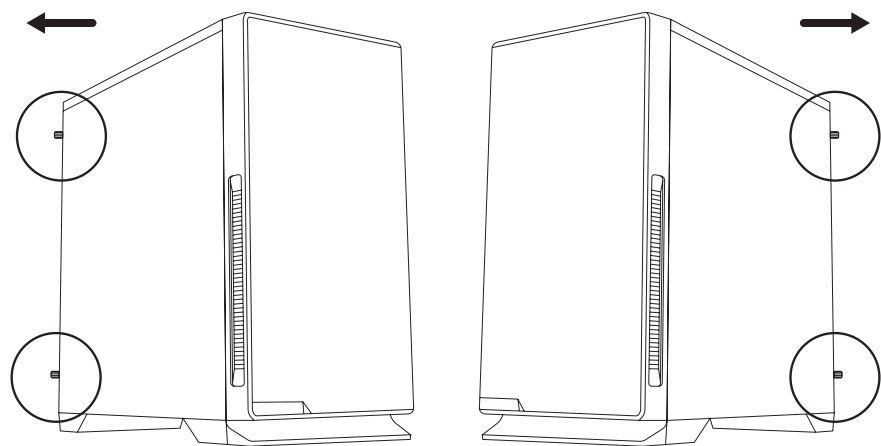


Remove the thumb screws located at the back on the left panel. Slide the panel backwards to release it.

Remove the thumb screws located at the back on the right panel. Slide the panel backwards to release it.



STORAGE UNITS INSTALLATION

3x 2.5" STORAGE UNITS

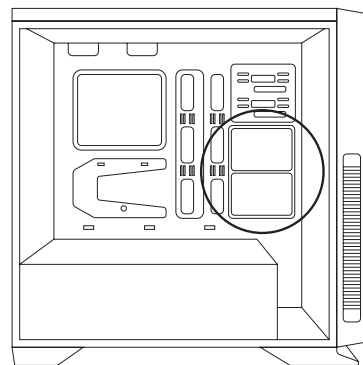


1) You can install 2x 2.5" storage units on the motherboard panel. Align the storage units with the fixation holes. Attach the screws through the opposite side.

2.1) Remove the 2.5" storage unit fixation plate from the backside of the motherboard panel.

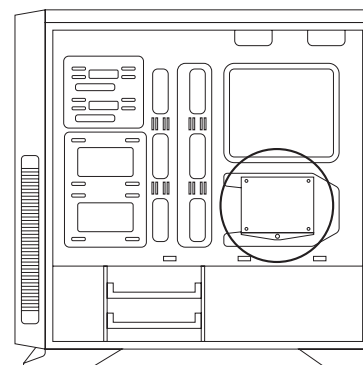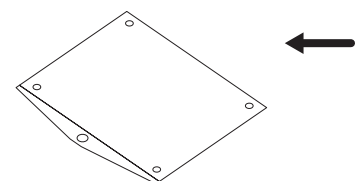


2.2) Place the 2.5" unit over the fixation plate and align it with the holes. Attach the storage unit to the fixation plate by inserting the screws from the bottom.

Reinstall the fixation plate back into the PC case.




STORAGE UNITS INSTALLATION

2x 3.5" STORAGE UNITS

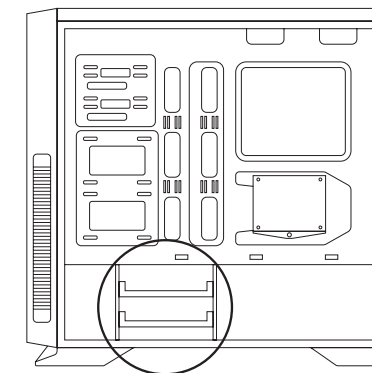


1.1) Remove the 3.5" storage unit drawer from the PC case.



1.2) Place the 3.5" unit over the storage drawer. Screw the storage unit to the drawer by inserting the screws through the bottom.

Reinstall the drawer back into the PC case.


! Repeat steps 1.1 and 1.2 to install another 3.5" storage unit.

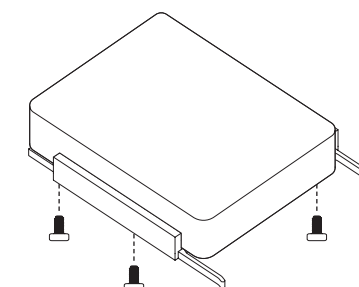


OPTICAL UNITS INSTALLATION

2x 5.25" OPTICAL UNITS

1) You can install 2x 5.25" optical units on the available drive bays. Remove the drive bay cover located on the front panel. Insert the optical unit and attach it to the PC case from the sides.

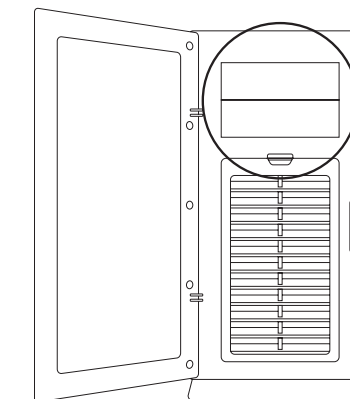

TOP PANEL COVER

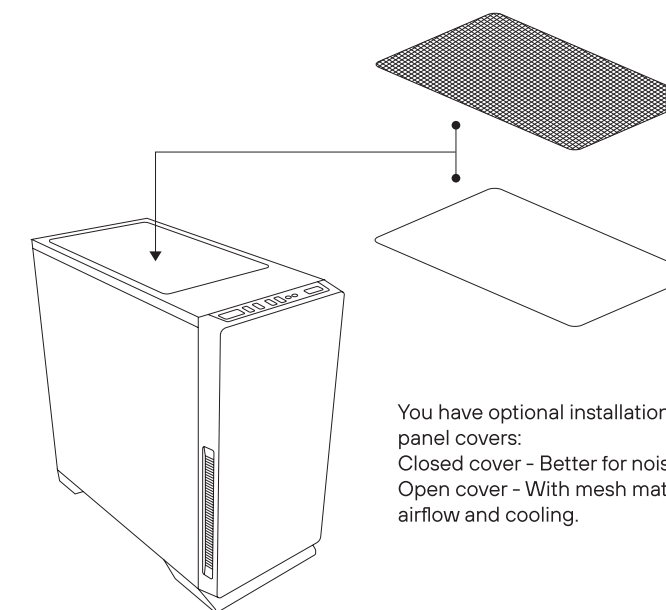

You have optional installation between two top panel covers:
Closed cover - Better for noise cancelling.
Open cover - With mesh material, better for airflow and cooling.



zolyd.eu

TECHNICAL ASSISTANCE

Regarding technical issues, please visit www.zolyd.eu or contact us through support@zolyd.eu.

CE STATEMENT OF COMPLIANCE WITH EUROPEAN UNION DIRECTIVES

Zolyd declares that this product is in compliance with the essential requirements and other relevant provisions from the following Directives: 2014/30/EU; 2011/65/EU; 2014/35/EU, as applicable.


The technical documentation required by the Conformity Evaluation Process is in Zolyd's possession and can be requested through support@ilectry.eu.

DISPOSAL OF BATTERIES AND ELECTRICAL OR ELECTRONIC EQUIPMENT WASTE

The existence of this symbol on the product, batteries or respective packaging, signifies that this product and the contained batteries can not be disposed as domestic waste. It is the user's responsibility to deliver this product at a batteries, electrical or electronic recycling pick-up point. The pick-up and separate recycling contributes for the preservation of natural resources and supresses potential negative consequences for the human health and the environment resultant of inadequate disposal of dangerous substances contained in batteries and electrical or electronic equipment. For additional informations regarding batteries, electrical or electronic recycling pick-up points, please contact your local municipal services.


FAN CONTROLLER INSTALLATION

The fan speed controller is located on the front panel.
Three speeds supported: low, medium, high.
Five fans maximum capacity.
Two fans on FAN1 channel.
Three fans on FAN2 channel.



Connect the fan plug to FAN1 or FAN2, according with your preferences.

There are two FAN1 plugs and three FAN2 plugs.



COMPATIBILITY

Motherboard: ATX, Micro-ATX
CPU cooler: 175 mm max. height
GPU: 390 mm max. length
Connections: 2x USB-A 2.0; 2x USB-A 3.0; 1x audio in; 1x audio out; 1x TF card;
1x Micro SD card
Expansion slots: 7
Liquid cooling (not included): Front: 120 / 240 mm • Back: 120 mm • Top: 120 / 240 mm

ZOLYD

vilorian

ATX Computer Case

User Guide