

WANT
TO KNOW
MORE?

zolyd.eu

CE STATEMENT OF COMPLIANCE WITH EUROPEAN UNION DIRECTIVES

Zolyd declares that this product is in compliance with the essential requirements and other relevant provisions from the following Directives: 2014/30/EU; 2011/65/EU, as applicable. The technical documentation required by the Conformity Evaluation Process is in Zolyd's possession and can be requested through support@zolyd.eu.

DISPOSAL OF BATTERIES AND ELECTRICAL OR ELECTRONIC EQUIPMENT WASTE

The existence of this symbol on the product, batteries or respective packaging, signifies that this product and the contained batteries can not be disposed as domestic waste. It is the user's responsibility to deliver this product at a batteries, electrical or electronic recycling pick-up point. The pick-up and separate recycling contributes for the preservation of natural resources and suppresses potential negative consequences for the human health and the environment resultant of inadequate disposal of dangerous substances contained in batteries and electrical or electronic equipment. For additional informations regarding batteries, electrical or electronic recycling pick-up points, please contact your local municipal services.

TECHNICAL ASSISTANCE

Regarding technical issues, please visit www.zolyd.eu or contact us through support@zolyd.eu.

SAFETY - EU 2023/988

Electrical installation: Use only with certified and compatible computer power supply units. Do not connect or disconnect fans while the equipment is powered on.

Risk of electric shock: Never expose the PC case or fans to liquids. Do not use the product if cables or connectors are damaged.

Ventilation and heating: Ensure proper airflow when installing the PC case. Do not block the ventilation openings. Avoid placing the product near heat sources or in excessively humid environments.

Mechanical safety: Be careful when handling internal metal edges — risk of cuts. Keep fingers, hair, and objects away from operating fans.

Use and maintenance: This product is intended for indoor use only. Clean dust regularly with a dry cloth; never use solvents or aggressive cleaning products. Do not attempt to modify or repair fans without qualified technical assistance.

Intended users: Not suitable for children. Keep small parts (screws, accessories) out of the reach of children and pets.

ARGB FAN HUB INSTALLATION

The ARGB fan hub is located behind the motherboard's installation panel.

- 1) Turn off the PC and the PSU.
- 2) Plug the motherboard's RGB cable **(A)**; plug the SATA's power cable **(B)**; plug the RGB FX button's cable **(C)**.

- 3) Connect the fan LED plug **(D)** on LED 1 port and the fan power plug **(E)** on FAN 1 port.

Repeat step 3, correspondingly, for the other fans.

The LED and FAN port pins are fragile. Be careful, make sure they are properly aligned with the plugs during installation. Do not force.

COMPATIBILITY

Motherboard: Micro-ATX, Mini-ITX


CPU cooler: 174 mm max. height

GPU: 400 mm max. length

Connections: 2x USB-A 3.0; 1x USB-C 3.1; 1x audio in/out

Expansion slots: 4

Liquid cooling (not included): Rear: 120 mm • Top: 120 / 240 / 360 mm

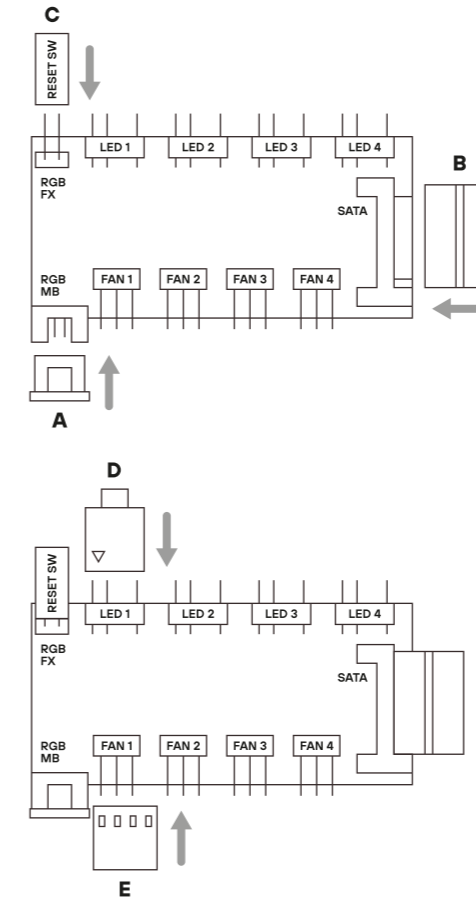


neo SERIES

KARION WD


MICRO-ATX COMPUTER CASE

User Guide

ACCESSORIES

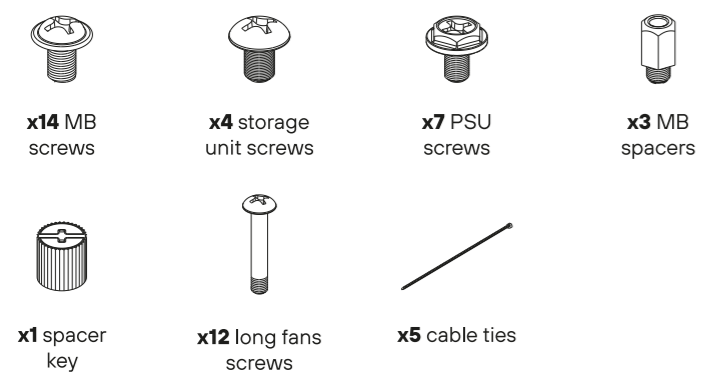

OPENING THE PC CASE

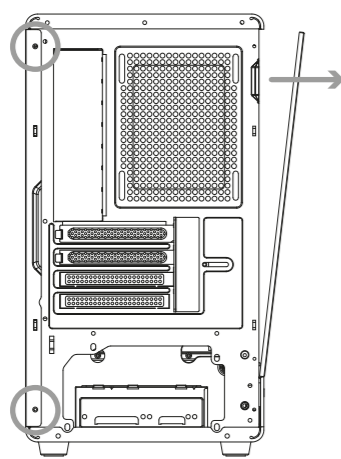


Remove the screws located at the back of the left panel. Slide the panel backwards to release it.

Open the right panel from the top rear, pulling it from the PC case. Pull it slightly up to release it from the bottom side.


STORAGE UNITS INSTALLATION

1x 2.5" STORAGE UNITS




1.1) Remove the storage unit fixation plate from the PC case. Remove the screw and pull it out.

1.2) Place the 2.5" unit on top of the fixation plate. Attach the storage unit to the plate by inserting the screws through the bottom. Reinstall the fixation plate back into the PC case.




STORAGE UNITS INSTALLATION


2x 3.5" STORAGE UNITS OR 1x 3.5" + 1x 2.5"



1) Remove the storage units drawer from the PC case. Remove the screws from the outside bottom of the PC case and pull it out.



2) Place the 3.5" unit over the storage drawer. Attach the storage unit to the drawer by inserting the screws through the bottom. Insert the second 3.5" unit on the drawer. Attach it by inserting the screws through the sides. Reinstall the drawer back into the PC case.




3) Place the 2.5" unit over the storage drawer. Attach the storage unit to the drawer by inserting the screws through the bottom. Insert the 3.5" unit on the drawer. Attach it by inserting the screws through the sides. Reinstall the drawer back into the PC case.

EXTRA FANS OR LIQUID COOLING INSTALLATION

Align the fans or radiators with the fixation holes on the top, front, rear panels, PSU chamber or Motherboard area on the PC case. Attach the fixation screws on the fans or radiators.


Top panel: 3x 120 mm or 2x 140 mm fans. 120, 240 or 360 mm radiators.

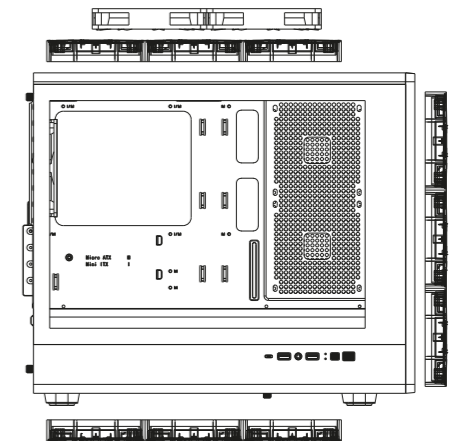

Front panel: 3x 120 mm fans.

PSU chamber: 3x 120 mm fans.

Rear panel: 1x 120 mm fan. 120 mm radiator.

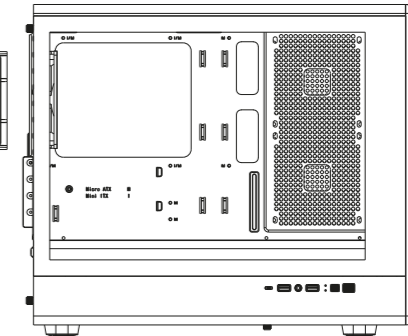

Motherboard: 2x 120 mm fans.